

SW-SL2-16P-2G2F

16-Port PoE switch




قابلیت های کلیدی

- حالت های کاری نرمال، ایمن، نظارت تصویری
- کنترل ترافیک پورت ها
- انتقال دیتا و برق تا 250 متر در حالت نظارت تصویری

Specifications

Ports	16×100Mbps PoE ports (RJ45)+2×1000Mbps Combo ports	Operating humidity	10%~90% (noncondensing)
Standards	IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3ab, IEEE802.3x, IEEE802.3af, IEEE802.3at, IEEE802.3az	Storage humidity	5%~90% (noncondensing)
Switching capacity	7.26Gbps	Indicator	PWR: Steady on: AC input is normal Off: No AC input
Forwarding performance	5.36Mpps		PoE: Off: No PoE power supply Steady on: PoE power supply is normal Flashing: PoE power supply is abnormal
Packet Buffer	4Mbit		LINK/ACT: Off: No link Steady: Linked at 10/100Mbps Flashing: Transmitting data
MAC	16K		Speed: Off: Linked at 10/100Mbps On: Linked at 1000Mbps
Dimensions (W×D×H)	440mm x 207mm x 45mm(17.3"×8.1"×1.8")	Working Mode	Default(Normal mode) : All ports can communicate with each other. VLAN(Secure mode): Downlink ports can communicate only with uplink ports. EXTEND(Surveillance mode): Transmission distance up to 250 meters ,also downlink ports can communicate only with uplink ports.
Weight	<4.2kg		
Power supply	AC: 100-240V, 50/60Hz		
PoE	802.3at/af		
Max. PoE Power	Max capacity: 250W Max capacity for single port: 30W		
Switch Power	270W		
Surge Protection	Common mode ±6KV Differential mode ±4KV		
Electrostatic standard	Common mode ±6KV Differential mode ±8KV		
Cooling Fans	2		
Mean Time Between Failure(MTBF)	>50000 hours		
Ambient temperature	0°C-45°C (32°F-113°F)		

Dimensions

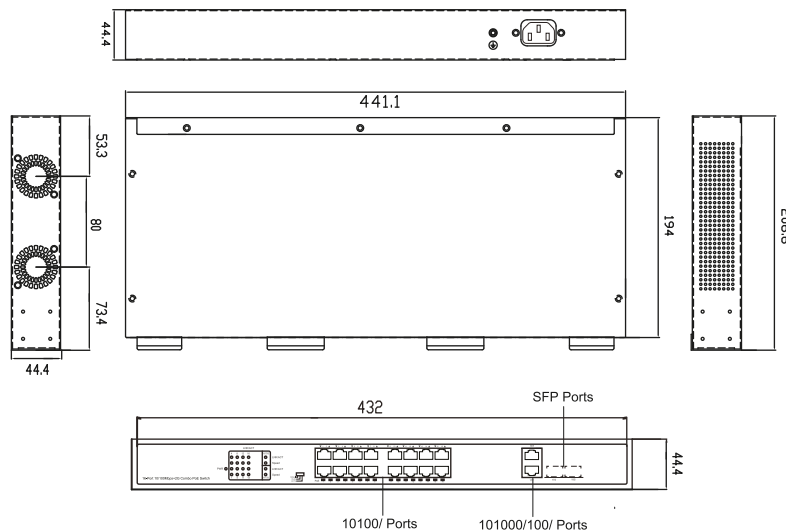

160