

IPC-P1A8W-I50S/D

8MP HD Intelligent LighterHunter IR VF Bullet Network Camera




قابلیت های کلیدی

- پشتیبانی از پروتکل ONVIF
- دمای کارکرد -30 تا +60 درجه سانتیگراد
- بدنه ضد ضربه با استاندارد IK10
- مقاومت در برابر نفوذ آب و گرد و غبار IP67
- پایه قابل تنظیم 3 حالت
- پشتیبانی از 3 استریم تصویر
- پشتیبانی از ROI
- پشتیبانی از OSD قابل تنظیم
- پشتیبانی از حالت راهرو 9:16
- قابلیت روز و شب
- IR هوشمند 50 تا 80 متر
- کاهنده نویز دیجیتال 3D
- Ultra265, H.265, H.264, MJPEG

Specifications

Sensor	1/2.8", 8.0 megapixel, progressive scan, CMOS			
Minimum Illumination	Colour: 0.0025 lux (F1.6, AGC ON) 0 lux with IR on			
Day/Night	IR-cut filter with auto switch (ICR)			
Shutter	Auto/Manual, 1 - 1/100000s			
Adjustment angle	Pan: 0° - 360°	Tilt: 0° - 90°	Rotate: 0° - 360°	
WDR	120dB			
S/N	>58 dB			
Lens	2.8 - 12mm, AF automatic focusing and motorized zoom lens			
Iris	Fixed			
Field of View (H)	107.4° - 29.2°			
Field of View (V)	54.2° - 16.3°			
Field of View (D)	111.0° - 33.1°			
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)
	2.8	86.9	34.8	17.4
	12	372.4	149.0	74.5
IR Range	50-80m IR range			
Wavelength	850nm			
IR On/Off Control	Auto/Manual			
Video Compression	Ultra 265, H.265, H.264, MJPEG			
Frame Rate	Main Stream: 8MP (3840*2160), Max 20fps; 5MP (3072*1728), Max 30fps; 4MP (2560*1440), Max 30fps; 1080P (1920*1080), Max 30fps;			
	Sub Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;			
	Third Stream: D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;			
	128 Kbps-16 Mbps			
Video Bit Rate	128 Kbps-16 Mbps			
OSD	Up to 8 OSDs			
Privacy Mask	Up to 4 areas			
ROI	Up to 8 areas			
Video Stream	Triple streams			
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2			
Smart IR	Support			
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise			
Dewarping	Support			
HLC	Support			
BLC	Support			
Defog	Digital Defog			
Smart Features	Deep learning, smart intrusion prevention (Cross Line, Enter area, Leave Area, intrusion), People counting (Deep learning), people flow counting (Deep learning), Crowd density monitoring, Face capture (Maximum 8)			
Basic Detection	Motion detection, Ultra motion detection, Tampering alarm, Audio detection			
General Function	Watermark, IP address filtering, tampering alarm, alarm input, alarm output, access policy, ARP protection, RTSP authentication, user authentication			
Audio Compression	G.711			
Audio Bitrate	64 Kbps			
Two-way audio	Support			
Suppression	Support			
Sampling Rate	8KHZ			
Edge Storage	Micro SD, up to 256GB			
Network Storage	ANR, NAS(NFS)			
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS, SSH			
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API, SDK			
User/Host	Up to 32 users. 2 user levels: administrator and common user			
Security	Password protection, strong password, HTTPS encryption, Export operation logs, basic and digest authentication for RTSP, digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF			
Audio I/O	Input: impedance 35kΩ; amplitude 2V [p-p] Output: impedance 600Ω; amplitude 2V [p-p]			
Alarm I/O	1/1			
RS485	N/A			
Built-in Mic	N/A			
Built-in Speaker	N/A			
WIFI	N/A			
Network	1 * RJ45 10M/100M Base-TX Ethernet			
Video Output	N/A			
Protection	IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013) IK10 (IEC 62262:2002)			
Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 10.5W			
Power Interface	Ø 5.5mm coaxial power plug			
Dimensions (L x W x H)	245 x 86 x 72mm (9.6" x 3.4" x 2.8")			
Weight	0.92kg (2.03lb)			
Material	Metal			
Working Environment	-30°C - 60°C (-22°F - 140°F), Humidity: ≤95% RH (non-condensing)			
Storage Environment	-30°C - 60°C (-22°F - 140°F), Humidity: ≤95% RH (non-condensing)			
Surge Protection	6KV			
Reset Button	N/A			

Dimensions

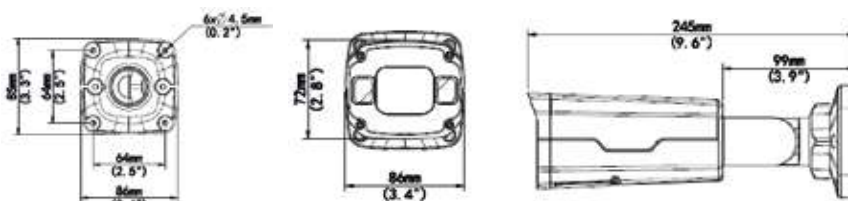

46