

# NVR-E10-1A/R

Network Video Recorder



## قابلیت های کلیدی

- یک عدد 4K HDMI و یک عدد VGA همزمان
- پشتیبانی از 1 عدد هارد تا ظرفیت 6 ترابایت
- قابلیت برگرداندن تصاویر ضبط شده بعد از قطع شبکه
- قابلیت بروزرسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265, H.265, H.264
- 10 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF

## Specifications

IP Video Input	10-ch
Incoming bandwidth	64Mbps
Outgoing bandwidth	32Mbps
Remote Users	128
Protocols	P2P, UPnP, DHCP
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1440x900/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1440x900/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
Audio Output	1-ch, 3.5mm
Synchronous Playback	10-ch
Corridor Mode Screen	3/4/5/7/9/10
Decoding format	Ultra 265/H.265/H.264

Liveview/Playback	8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D2/1CIF/CIF/QCIF
Capability	1 x 8MP@1,30 x 5MP@2,30 x 4MP@4,30 x 3MP@4,25 x 1080p@8,30 x 720p@30, 10 x D30@1
SATA	1 SATA interface
Capacity	up to 6TB
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
VCA Detection	Cross Line, Enter Area, Leave Area, Intrusion, Loitering, People gathering, Parking, Quick moving, object left, object moving, Auto tracking
Power Supply	12V DC Power Consumption: ≤3 W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	260mm × 243mm × 46mm (10.2" × 9.6" × 1.8")
Weight (without HDD)	≤1kg (2.2lb)

## Dimensions

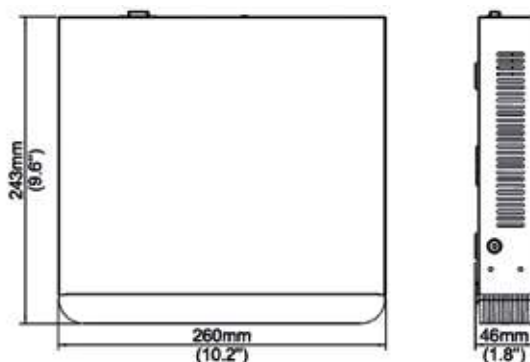

## Rear Panel

