

NVR-E04-1C

Network Video Recorder



قابلیت های کلیدی

- یک عدد 4K HDMI و VGA همزمان
- پشتیبانی از 1 عدد هارد تا ظرفیت 6 ترابایت
- قابلیت بروزرسانی آنلاین

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 4 کانال تصویر ورودی تا رزولوشن 4K
- پشتیبانی از دوربین های با پروتکل ONVIF

Network
Cameras

NVRs

Video
Decoders

Controller

Switches


Accessories

Specifications

IP Video Input	4-ch
Incoming Bandwidth	64Mbps
Outgoing Bandwidth	48Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP, RTSP
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, 3.5mm
Audio Compression	G.711A, G.711U
Synchronous Playback	4-ch
Liveview display	1/4
Corridor Mode Screen	3/4
FTP/Schedule/Event Snapshot	1-ch snapshot, up to D1 resolution

Decoding format	Ultra 265/H.265/H.264
Live view/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080p@30
SATA	1 SATA interface
Capacity	up to 6TB for each disk
VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, SIP
VCA Search	Face Search, Behavior Search
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
RS232	NA
RS485	NA
Alarm In	NA
Alarm Out	NA
Power Supply	12V DC Power Consumption: ≤5 W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	260mm × 240mm × 46mm (10.2"×9.4"×1.8")
Weight (without HDD)	≤0.98kg (2.16 lb)

Dimensions

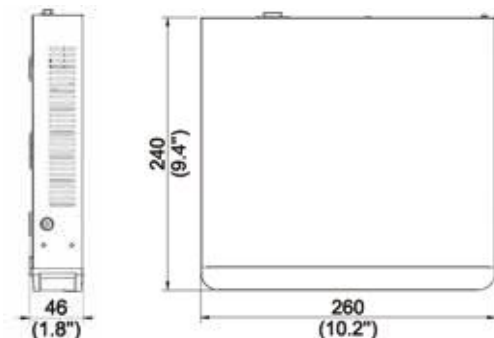

Rear Panel

