

# IPC-E1F2D-I30/D

2MP Mini Fixed Bullet Network Camera




## قابلیت های کلیدی

- قابلیت روز و شب
- IR هوشمند 30 تا 50 متر
- کاهنده نویز دیجیتال 3D
- Ultra265, H.265, H.264, MJPEG
- پشتیبانی از ROI
- OSD قابل تنظیم
- پشتیبانی از پروتکل ONVIF
- دمای کارکرد -30 تا +60 درجه سانتیگراد
- مقاومت در برابر نفوذ آب و گرد و غبار IP67
- پایه قابل تنظیم 3 حالت

## Specifications

|                         |   |            |                |               |                   |                         |   |
|-------------------------|---|------------|----------------|---------------|-------------------|-------------------------|---|
| Sensor                  | 1/2.8", 2.0 megapixel, progressive scan, CMOS   |            |                |               |                   | Privacy Mask            | Up to 4 areas   |
| Lens                    | 2.8mm@F2.0  |            |                |               |                   | ROI                     | Up to 8 areas   |
| DORI Distance           | Lens (mm)   | Detect (m) | Observe (m)    | Recognize (m) | Identify (m)      | Motion Detection        | Up to 4 areas   |
|                         | 2.8   | 43.4       | 17.4           | 8.7           | 4.3               | White Balance           | Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2                               |
| Angle of View (H)       | 106.7°  |            |                |               |                   | Smart Features          | N/A   |
| Angle of View (V)       | 57.1°   |            |                |               |                   | Digital Noise Reduction | 2D/3D DNR   |
| Angle of View (D)       | 115.7°  |            |                |               |                   | Smart IR                | Support   |
| Adjustment angle        | Pan: 0° - 360°  |            | Tilt: 0° - 90° |               | Rotate: 0° - 360° | Flip                    | Normal/Vertical/Horizontal/180°   |
| Shutter                 | Auto/Manual, 1 - 1/100000s  |            |                |               |                   | Dewarping               | N/A   |
| Minimum Illumination    | Colour: 0.01Lux (F2.0, AGC ON)<br>0Lux with IR on   |            |                |               |                   | HLC                     | Supported   |
| Digital noise reduction | 2D/3D DNR   |            |                |               |                   | BLC                     | Supported   |
| Day/Night               | IR-cut filter with auto switch (ICR)  |            |                |               |                   | Protocols               | IPv4, IGMP, ICMP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, UPnP, HTTP |
| S/N                     | >52dB   |            |                |               |                   | Compatible Integration  | API   |
| IR Range                | 30-50m IR range   |            |                |               |                   | Web Browser             | Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+ANR              |
| Wavelength              | 850nm   |            |                |               |                   | Network                 | 10/100M Base-TX Ethernet  |
| IR On/Off Control       | Auto/Manual   |            |                |               |                   | Power                   | DC 12V±25%, PoE (IEEE 802.3af)<br>Power consumption: Max 5.5W                 |
| Defog                   | Digital Defog   |            |                |               |                   | Dimensions (L x W x H)  | 161 x 63 x 62mm (6.4" x 2.5" x 2.4")  |
| WDR                     | 100dB   |            |                |               |                   | Net Weight              | 0.27kg (0.60lb)   |
| Video Compression       | Ultra 265, H.265, H.264   |            |                |               |                   | Material                | Metal + Plastic   |
| Frame Rate              | Main Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps                                       |            |                |               |                   | Working Environment     | -30°C - 60°C (-22°F - 140°F), Humidity: ≤95% RH (non-condensing)              |
|                         | Sub Stream: D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; |            |                |               |                   | Storage Environment     | -30°C - 60°C (-22°F - 140°F), Humidity: ≤95% RH (non-condensing)              |
| Video Bit Rate          | 128 Kbps-16 Mbps  |            |                |               |                   | Surge Protection        | 4KV   |
| OSD                     | Up to 4 OSDs  |            |                |               |                   | Ingress Protection      | IP67  |
|                         |   |            |                |               |                   | Reset Button            | N/A   |

## Dimensions

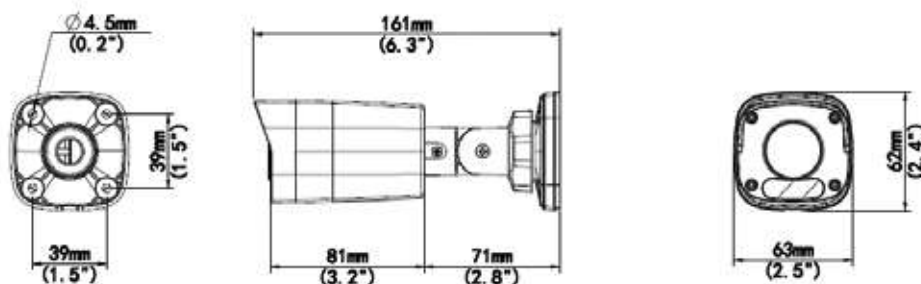

Network  
Cameras

NVRs

AHD  
Series

Video  
Decoders

Switches

Accessories