

## NVR-E32-4D

Network Video Recorder



### قابلیت های کلیدی

- یک عدد HDMI 4K و یک عدد VGA
- پشتیبانی از 4 عدد هارد تا ظرفیت 8 ترابایت برای هر کدام
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروزرسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265, H.265, H.264
- 32 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF

### Specifications

IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Incoming bandwidth	160Mbps
Outgoing bandwidth	64Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP
HDMI/VGA Output	HDMI: 4K (3840x2160) @30, 1920x1080p@60, 1920x1080p@50, 1600x1200@60, 1280x1024@60, 1280x720@60, 1024x768@60 VGA: 1920x1080p@60, 1920x1080p@50, 1280x1024@60, 1280x720@60, 1024x768@60
Audio Output	1-ch, RCA
Audio Compression	6.711A, 6.711U
Recording Resolution	8MP/5MP/4MP/3MP/1080p/960p/720p/960H/720p/D1/2CIF/CIF
Synchronous Playback	32-ch
Liveview display	1/4/6/8/9/16/25/36
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
FTP/Schedule/Event Snapshot	4-ch snapshot, up to D1 resolution
Decoding format	Ultra 265/H.265/H.264
Live view/ Playback	8MP/5MP/4MP/3MP/1080p/960p/960H/720p/D1/2CIF/CIF
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p @30, 32 x D1

VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, People Counting, People flow Counting, Crowd density monitoring, Scene Change detection, Defocus detection, Auto Tracking, Object Left Behind, Object Removed, SIP by IPC
VCA Search	Face Search, Behavior Search
SATA	4 SATA interfaces
Capacity	Up to 8TB for each disk (The maximum HDD capacity varies with environment temperature)
Smart Intrusion Prevention (SIP) by Camera	8-ch
General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Rear panel: 1 x USB1.1, 2.0 x USB3.0 Front panel: 1 x USB2.0
RS232	NA
RS485	NA
Alarm In	NA
Alarm Out	NA
Power Supply	12V DC Power Consumption: ≤ 15W( without HDD )
Working Environment	*10-C ~ +55C (*14+F ~ *131+F), Humidity ≤ %90 RH(non-condensing)
Dimensions (W×D×H)	440mm × 344mm × 50mm (2.0× *13.5 × *17.3")
Weight (without HDD)	≤ 3.15 Kg (6.94 lb)

### Dimensions

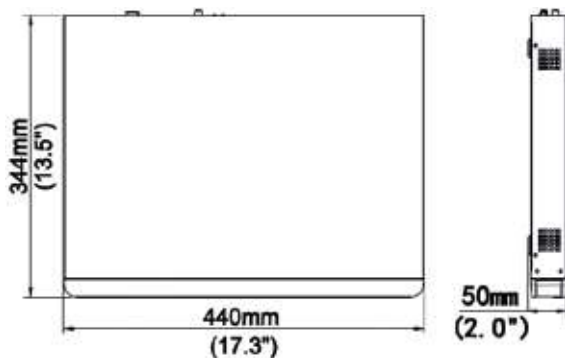

### Rear Panel

