

SW-SL2-4P-2E

4-Port PoE Switch




قابلیت های کلیدی

- حالت های کاری نرمال، ایمن، نظارت تصویری
- کنترل ترافیک پورت ها
- انتقال دیتا و برق تا 250 متر در حالت نظارت تصویری

Specifications

Ports	6×100Mbps network ports (RJ45), including 4 PoE ports	Operating humidity	10%~90% (noncondensing)	
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at	Storage humidity	5%~90% (noncondensing)	
Switching capacity	1.2Gbps	Indicator	PWR: Steady on: AC input is normal Off: No AC input	
Forwarding performance	0.90Mpps		PoE: Off: No PoE power supply Steady on: PoE power supply is normal Flashing: PoE power supply is abnormal	
Packet Buffer	768Kbit		LINK/ACT: Off: No link Steady: Linked at 10/100Mbps Flashing: Transmitting data	
MAC	2K		Speed: Off: Linked at 10/100Mbps On: Linked at 1000Mbps	
Dimensions (W×D×H)	160mm x 93mm x 32mm(6.3"×3.7"×1.3")		Working Mode	Default (Normal mode): All ports can communicate with each other. EXTEND(Surveillance mode): Transmission distance up to 250 meters, also downlink ports can communicate only with uplink ports.
Weight	<0.6kg			
Power supply	AC: 100-240V, 50/60Hz			
PoE	802.3at/af			
Max. PoE Power	Max capacity: 65W Max capacity for single port: 30W			
Switch Power	67W			
Surge Protection	Common mode ±6KV Differential mode ±4KV			
Electrostatic standard	Common mode ±6KV Differential mode ±8KV			
Cooling Fans	0			
Mean Time Between Failure(MTBF)	>50000 hours			
Ambient temperature	0°C-45°C (32°F-113°F)			

Dimensions

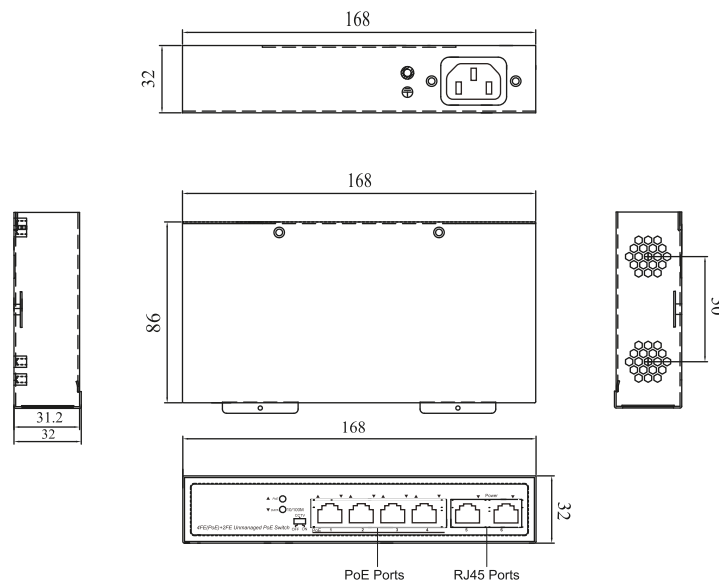

158

